
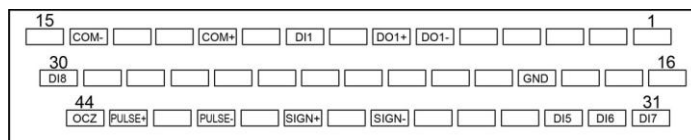


## Connection between RadonixPC+ and DELTA ASDA-B2

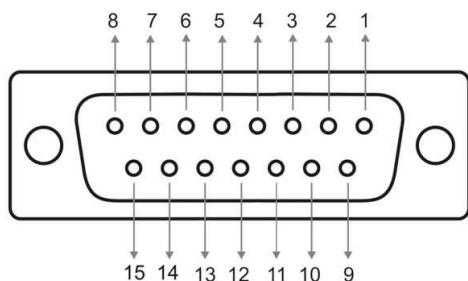

**RadonixPC+ (DB15F)**

**ASDA-B (DB25F)**

| RadonixPC+ Pin | Description  | ADSA-B2 Pin |
|----------------|--------------|-------------|
| 1              | VCC +24 V    | 11          |
| 2              | Direction -  | 37          |
| 3              | Direction +  | 39          |
| 4              | Pulse -      | 41          |
| 5              | Pulse +      | 43          |
| 6              | Servo On     | 9           |
| 7              | Ready        | 7           |
| 8              | Encoder Zero | 44          |
| 9              | Reset Alarm  | 33          |
| 10             | Ground       | 32          |
| 11             | Ground       | 31          |
| 12             | Ground       | 30          |
| 13             | Ground       | 19          |
| 14             | Ground       | 6           |
| 15             | Ground       | 14          |